




CAUTION: THIS ACTION WILL VOID WARRANTY

**DO NOT WRENCH AGAINST PUSH-FIT FITTING
WHEN TIGHTENING UNION.**

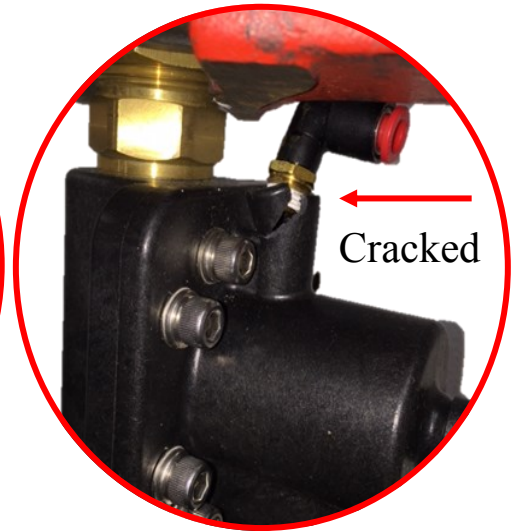

IF YOUR WHID TRIPS - RESET INSTRUCTIONS

1. Close cold water supply valve to the water heater. If applicable, close expansion tank shut-off valve.
2. Open any hot water faucet to relieve the pressure.
3. The [BRASS RESET PIN] will depress easily only when all pressure is released. **(Note: If pressure releases slowly, you may have to wait 5 - 10 minutes before you can reset the WHID.)**
4. Once all pressure is released:
 - **With your finger**, push the WHID's [BRASS RESET PIN] in (**Figure 1**) until the red line on pin disappears. **DO NOT USE A HAMMER (Figure 2)**. Open the cold water shut off valve.
 - Open the expansion tank shut-off valve if applicable.
 - Return to the open faucet and check for normal flow.

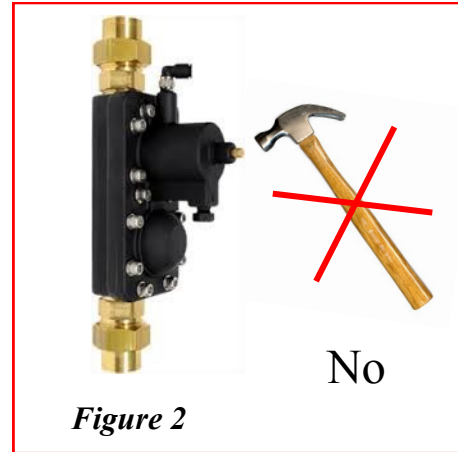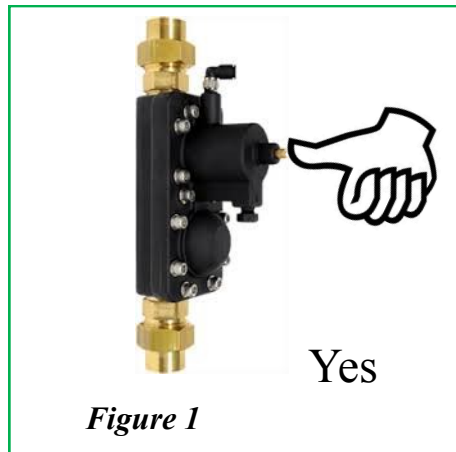

Distributed by: Towle Whitney LLC 21 Londonderry Turnpike, Hooksett NH 03106

www.stopwaterheaterleaks.com 603-626-7371 or 1-800-807-9827

rev 4-2016