


# Test and Reset procedure for the WHID



1. **To TEST:** ensure all hot water faucets are closed.
2. Connect a hose to the water heater drain.
3. Slightly open the drain (which simulates a leak).
4. The WHID will activate, as indicated by the red ring on the brass reset pin.

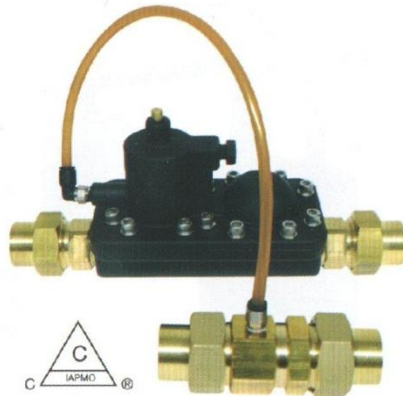

5. **To RESET:** turn off water supply to the water heater.
6. Open any hot water faucet.
7. Once the pressure you will be able to press the brass pin in this reset s the WHID.
8. Open water heater supply. The WHID is now working normally.
9. Close the open faucet.